

# TSS 25 L Connector for flight to landing

#### Five in one connector!

#### **Connector flight to landing**

Remove the nib with this elegant 25kN connector for stair flight to landing.

#### Lifting

Approved for lifting in production and installation

#### Leveling adjustment

Fast and easy leveling flight to landing. No need for shimming.


#### Reinforcement included

No need for local reinforcement.

#### **Sound insulation**

TSS 25 L with GB TSS 25 L reduce impact sound by 20-28 dB.


www.invisibleconnections.no

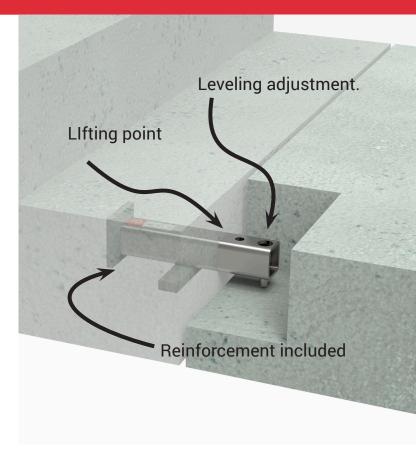

# Reduced production cost





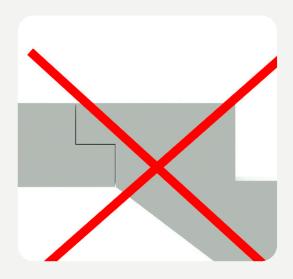

#### Less reinforcement steel

Reduces reinforcement steel in nib

## Simpler formwork

Save formwork and material

## Thinner landing 265 → 170 mm

Less concrete - Sustainable

### **Reduced freight costs**

Lighter weight for landing/stair

## No use for lifting anchors

No lifting anchors for handling in factory, no extra lifting anchors needed for installation

## Reduced work for turning stair

Reduced work for turning stair Reduced damaged when you turn stair

## Connections for flight to landing



TSS 25 L Stair flight to landing connector with adjustment and lifting device. Included reinforcement.



GF 25 L Rubber flange



GB TSS 25 L Sound insulation Box


## Reduced installation cost

## Installation on site



- Reusable
- Reduced working time
- Less shims
- · No flicking of lifting anchors
- No cost for temporary staircase
- Reduced cost for soundinsulation connected to main floor
- Access stair before casting

## Fast and easy adjustment

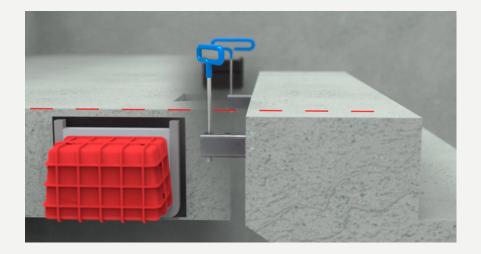

TSS 25 L w/soundreduction connected to main floor/landing/filigree slab

